



SFC5-01

SFC5-02

关键特性 Key Features

- 黄铜镀锡 / 磷青铜镀锡
Brass Tin-plated / Phosphor Bronze Tin-plated
- 专为PC板应用而设计
Designed for PC board applications
- 执行标准: UL 4248-1
Designed to UL 4248-1
- 无铅 Lead-free (Pb-free)
- 环保型产品 RoHS & REACH Compliant

应用 Applications

- 电源 Power Supply
- 家电 Household Appliance
- 防雷器 SPD
- 通用照明 General Lighting
- 智能家居 Smart Home
- 办公设备 Office Equipment
- 电动工具 Electric Tool
- 家庭娱乐设备 Home Entertainment Equipment
- 医疗设备 Medical Equipment
- 仪器仪表 Instruments and Apparatuses

适用范围 Available Range

外径5 mm圆筒型熔断体的PC板安装式熔断体管夹。
P.C. board mount fuse clip for 5 mm diameter fuses.


电气特性 Electrical Characteristics

额定电流 Rated Current: 10 A

类型 Type


挡耳类型 Ear Type

型号说明 Part Numbering System

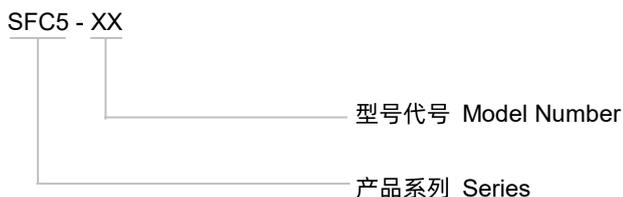


外形 Shape & 尺寸 Size (mm)

SFC5-01

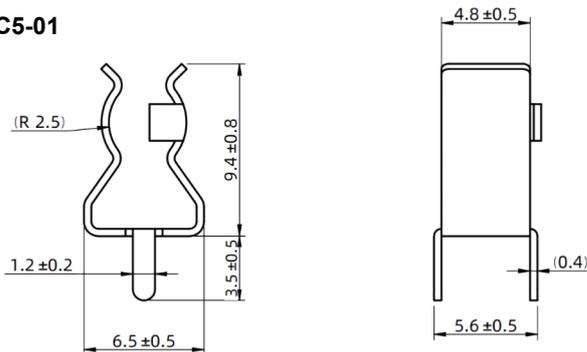

SFC5-02

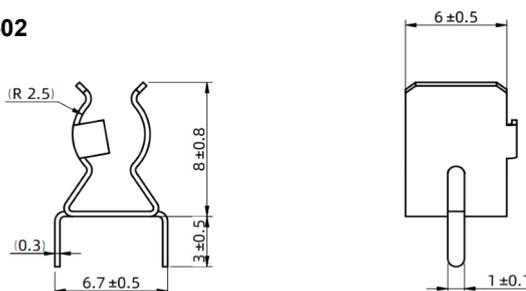


材料信息 Material Information

型号 Model	SFC5-01	SFC5-02
材料 Material	黄铜 Brass	磷青铜 Phosphor Bronze
材料厚度 Material Thickness	0.4 mm	0.3 mm
表面处理 Surface Treatment	镀锡 Tin Plated	
镀层厚度 Tin Plating Thickness	3 um ~ 6um	

机械特性 Mechanical Properties

第一插拔的力量: ≥ 10 N

The insertion and pulling forces of the first time: ≥ 10 N

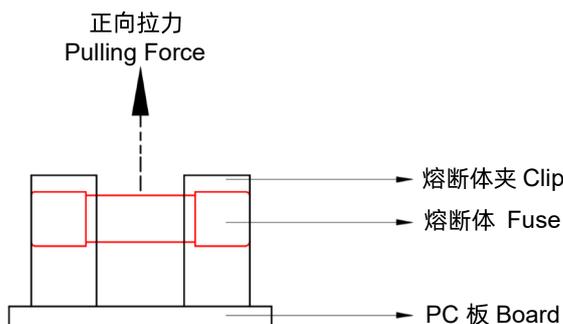

储存方式及期限 Storage Methods And Duration

储存条件：封口必须保持完整，建议储存温度25 °C（+5 °C，-10 °C）、湿度40% RH（+20% RH，-20% RH）。


Package need to be sealed completely, the recommended storage temperature 25 °C (+5 °C, -10 °C) and relative humidity 40% RH (+ 20% RH,-20% RH).

储存期限：未拆包为六个月，建议拆包后为一星期，产品拆包后有容易氧化的风险，如未使用完请封口。

Expiration date: For packing products: 6 months, For unpacking products: recommend one week. Due to the risk of oxidation for unpacking product, please seal completely the package for the remainders.

包装信息 Packing Information

尺寸 Dimensions (mm)

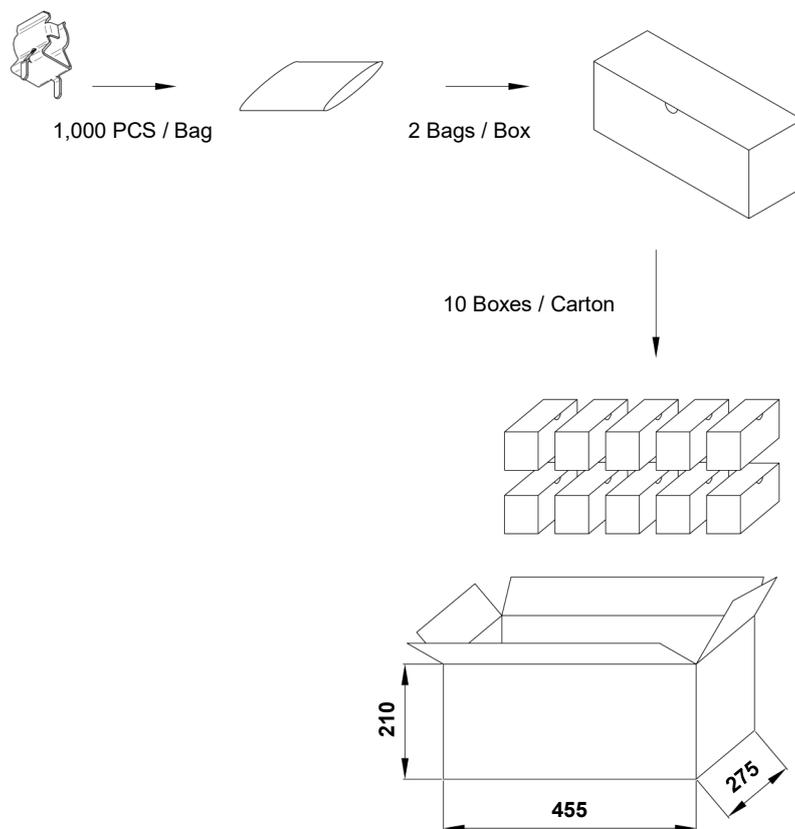

项目 Item	PE袋 Bag	盒 Box	箱 Carton
数量 Q'ty (PCS)	1,000	2,000	20,000
毛重 Gross Weight (kg)	8.0 ± 10%		