

电源 & 信号


电涌保护器(SPD)用防雷元器件

赛尔特解决方案产品


过电压保护 / 过温度 & 过电压保护 / 过电流保护 / 过温度保护
11类产品 / 126个系列



MOV
压敏电阻芯片



TFV
热保护型压敏电阻
环氧包封型



TFMOV
热保护型压敏电阻
熔断合金型




TFMOV
热保护型压敏电阻
机械脱扣型




GDT
气体放电管



TVS
瞬态电压抑制二极管
标准型



LV Fuses
低压熔断器



ATCO
温度保险丝
合金型

2026

厦门赛尔特电子股份有限公司版权所有 V1.0, 2025年11月




赛尔特官网
www.SETsafe.com
www.SETfuse.com



赛尔特公众号

SETsafe | SETfuse 赛尔特

电源电涌保护器(SPD)用防雷元器件 赛尔特解决方案产品

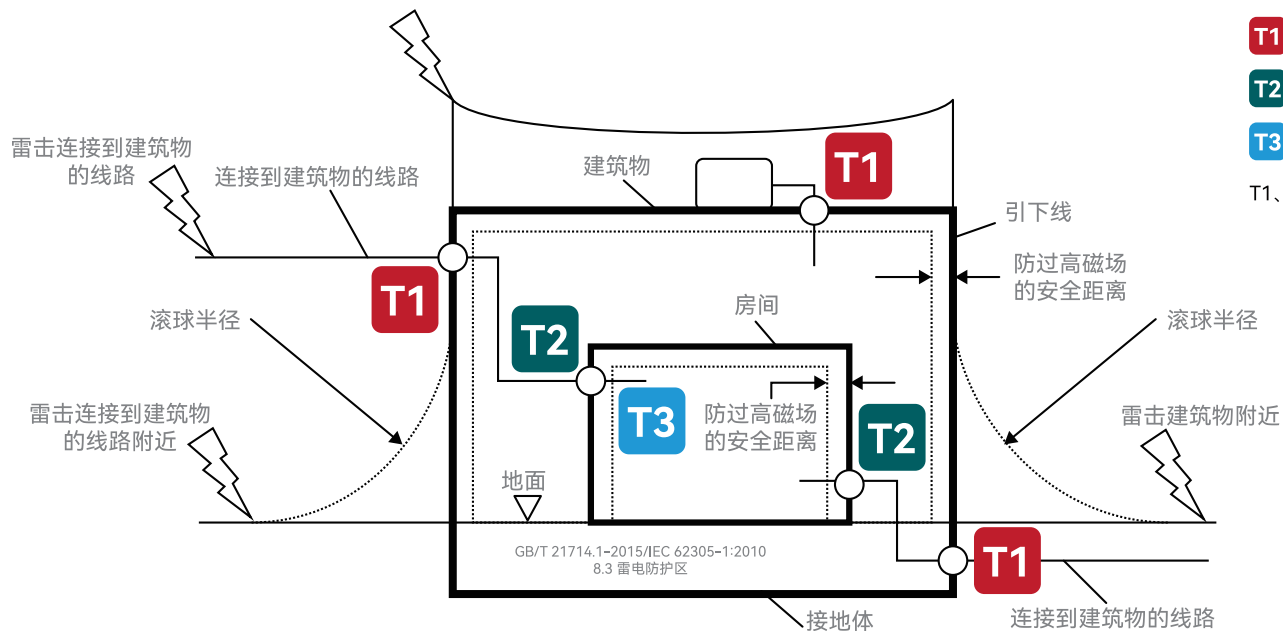

T1 I类实验 SPD (T1 SPD)

T2 II类实验 SPD (T2 SPD)

T3 III类实验 SPD (T3 SPD)

T1、T2、T3的颜色是赛尔特的识别，非标准要求

赛尔特解决方案产品

T1



压敏电阻芯片 (MOV)
-防雷型



气体放电管 (GDT)



热保护型压敏电阻 (TFMOV)
-机械脱扣型



低压熔断器 (LV Fuses)
-防雷器用

T2



压敏电阻芯片 (MOV)
-防雷型



热保护型压敏电阻 (TFMOV)
-熔断合金型 & -机械脱扣型



气体放电管 (GDT)



瞬态电压抑制二极管 (TVS)
-标准型



低压熔断器 (LV Fuses)
-防雷器用



温度保险丝 (ATCO)
-合金型

T3



压敏电阻 (MOV)
-标准型



热保护型压敏电阻 (TFV)
-环氧封装型



气体放电管 (GDT)



瞬态电压抑制二极管 (TVS)
-标准型



电涌抑制晶闸管 (TSS)



温度保险丝 (ATCO)
-合金型

T1 防雷元器件 赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
MOV 压敏电阻芯片 -防雷型	• YMJ34S T型 • YMJ33R T型 • YMJ36R T型 • YMJ40R T型	• 高10/350 μs冲击电流容量 • 同时满足T1+T2应用需求 • 兼容交流 & 直流应用需求 • 符合RoHS & REACH • 可定制尺寸开发	• 最大连续工作电压 (VAC): 150 ~ 680 V • 最大连续工作电压 (VDC): 200 ~ 895 V • 冲击放电电流 (I_{imp}) (10/350 μs): 3.5 ~ 12.5 kA • 标称放电电流 (I_n) (8/20 μs): 20 / 25 / 30 kA • 最大峰值电流 (I_{max}) (8/20 μs): 40 / 50 / 60 kA	01
	进一步了解 YMJ34S T型: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ34S-T-series.html YMJ33R T型: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ33R-T-series.html YMJ36R T型: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ36R-T-series.html YMJ40R T型: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ40R-T-series.html			
GDT 气体放电管	• SPO • SPP	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 600 / 800 V • 冲击放电电流 (I_{imp}) (10/350 μs): 25 ~ 100 kA • 标称冲击放电电流 (I_n) (8/20 μs): 100 kA • 最大放电电流 (I_{max}) (8/20 μs): 50 ~ 200 kA • 续流遮断能力: 100 A • 依要求定制连接方式	08
	进一步了解 SPO: 请联系销售人员, 邮箱: sales@SETfuse.com SPP: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPP-series.html			
TFMOV 热保护型 压敏电阻 -机械脱扣型	• TFMOV25M	• 机械脱扣热保护, 响应快 • 小尺寸, 节省空间 • 带遥信引脚和失效指示 • 满足交流和光伏直流应用需求 • 同时满足T1和T2应用需求 • 密封材料阻燃等级 V0 (UL 94) • 符合RoHS & REACH	• 最大连续工作电压 (U_c): 385 ~ 680 VAC • 最大连续工作电压 (U_{cpv}): 505 ~ 900 VDC • 冲击放电电流 (I_{imp}) (10/350 μs): 6 ~ 7.5 kA • 标称放电电流 (I_n) (8/20 μs): 20 kA • 最大放电电流 (I_{max}) (8/20 μs): 40 kA	07
	进一步了解 TFMOV25M: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermally-Protected-Varistors-TFMOV/TFMOV25M-series.html			
LV Fuses 低压熔断器 -防雷器用	• LFS14	• 良好的限流能力 • 良好的耐冲击能力 • 玻璃纤维复合管, 镀锡黄铜帽结构 • 执行标准: GB/T13539.2; GB/T18802.1 • 无铅 • 符合RoHS & REACH	• 额定电压: 400 / 690 VAC • 冲击放电电流 (I_{imp}) (10/350 μs): 10 kA • 标称放电电流 (I_n) (8/20 μs): 25 kA • 分断能力: 50 kA	19
	进一步了解 LFS14: https://www.setsafe.cn/Products/Over-Current-Protection/Low-Voltage-Fuses-LV-Fuses/LV-Fuses-for-Lightning-Protector/LFS14-series.html			

T2 防雷元器件 赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
MOV 压敏电阻芯片 -防雷型	• YMJ25D • YMJ25S • YMJ34S • YMJ37S • YMJ40S • YMJ53D	• 高通流密度 • 低限制电压 • 高工作温度 • 兼容交流 & 直流应用需求 • 符合RoHS & REACH	• 最大连续工作电压 (VAC): 50 ~ 750 V • 最大连续工作电压 (VDC): 170 ~ 1000 V • 标称放电电流 (I_n) (8/20 μs): 10 ~ 40 kA • 最大峰值电流 (I_{max}) (8/20 μs): 20 ~ 80 kA	02 ~ 03
	进一步了解 YMJ25D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ25D-series.html YMJ25S: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/YMJ25S-series.html YMJ34S: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/YMJ34S-series.html YMJ37S: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ37S-series.html YMJ40S: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ40S-series.html YMJ53D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ53D-series.html			
TFMOV 热保护型 压敏电阻 -熔断合金型	• TFMOV15S • TFMOV20S • TFMOV25S • TFMOV34S • TFMOV20SxxxL • TFMOV25SxxxL • TFMOV34SxxxL • TFMOV21R2P • TFMOV21R3P • TFMOV25D • TFMOV20K • TFMOV40K	• 小尺寸, 节省空间 • 通信引脚和失效指示 (可选) • 高通流等级范围, I_{max}最高可达100 kA • 密封材料阻燃等级 V0 (UL 94) • 符合RoHS & REACH	• 最大连续工作电压 (U_c): 17 ~ 750 VAC • 标称放电电流 (I_n) (8/20 μs): 1 ~ 40 kA • 最大放电电流 (I_{max}) (8/20 μs): 3 ~ 100 kA	05 ~ 07
	进一步了解 TFMOV10S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV10S-series.html TFMOV15S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV15S-series.html TFMOV20S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV20S-series.html TFMOV25S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV25S-series.html TFMOV34S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV34S-series.html TFMOV20SxxxL: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV20SxxxL-series.html TFMOV25SxxxL: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV25SxxxL-series.html TFMOV34SxxxL: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV34SxxxL-series.html TFMOV21R2P: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV21R2P-series.html TFMOV21R3P: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV21R3P-series.html TFMOV25D: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV25D-series.html TFMOV20K: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV20K-series.html TFMOV40K: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV40K-series.html			
TFMOV 热保护型 压敏电阻 -机械脱扣型	• TFMOV05M • TFMOV10M • TFMOV20M	• 机械脱扣热保护, 响应快 • 小尺寸, 节省空间 • 带通信引脚和失效指示 • 满足交流和光伏直流应用需求 • 密封材料阻燃等级 V0 (UL 94) • 符合RoHS & REACH	• 最大连续工作电压 (U_c): 50 ~ 750 VAC • 最大连续工作电压 (U_{cpv}): 65 ~ 1000 VDC • 标称放电电流 (I_n) (8/20 μs): 5 ~ 20 kA • 最大放电电流 (I_{max}) (8/20 μs): 10 ~ 40 kA	07
	进一步了解 TFMOV05M: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermally-Protected-Varistors-TFMOV/TFMOV05M-series.html TFMOV10M: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermally-Protected-Varistors-TFMOV/TFMOV10M-series.html TFMOV20M: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermally-Protected-Varistors-TFMOV/TFMOV20M-series.html			

T2 防雷元器件 赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
GDT 气体放电管	• SPA • SPB • SPC • SPH • SPI • SPJ • SPK • SPR • SPS • SPV • SPZ • SPX	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 90 ~ 3000 V • 冲击放电电流 (I_{imp})(10/350μs): 4 / 8 / 10 / 12.5 / 15 / 25 kA • 标称冲击放电电流 (I_n)(8/20 μs): 20 / 40 / 80 kA • 最大放电电流 (I_{max})(8/20 μs): 40 / 60 / 80 / 100 kA • 续流遮断能力 (I_l): 100 A • 依要求定制连接方式	08 ~ 09
	进一步了解 SPA: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPA-series.html SPB: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPB-series.html SPC: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPC-series.html SPH: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPH-series.html SPI: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPI-series.html SPJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPJ-series.html SPK: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPK-series.html SPR: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPR-series.html SPS: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPS-series.html SPV: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPV-series.html SPZ: 请联系销售人员, 邮箱: sales@SETfuse.com SPX: 请联系销售人员, 邮箱: sales@SETfuse.com			
TVS 瞬态电压抑制 二极管-标准型	• SPCL20	• 快速响应 • 玻璃钝化保护 • 优异的箝位性能 • 低浪涌电阻 • 小型化紧凑封装 • 符合IEC 61000-4-2标准的 数据线路的ESD保护 • 符合IEC 61000-4-4标准的 数据线路的EFT保护 • 封装材料阻燃等级94 V-0 • 无卤素, 符合RoHS要求	• 额定峰值脉冲电流 (I_{PP}) (8/20 μs): 20 kA • 反向关断电压 (V_R): 16 ~ 76 V	12
	进一步了解 SPCL20: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL20-series.html			
LV Fuses 低压熔断器 -防雷器用	• LFR10-xA04-y	• 良好的限流能力 • 良好的耐冲击能力 • 玻璃纤维复合管, 镀锡黄铜帽 结构 • 执行标准: GB/T13539.2; GB/T18802.1 • 无铅 • 符合RoHS & REACH	• 额定电压: 400 VAC • 标称放电电流 (I_n)(8/20 μs): 10 ~ 20 kA • 分断能力: 50 kA	19
	进一步了解 SPO: 请联系销售人员, 邮箱: sales@SETfuse.com			

T2 防雷元器件 赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
ATCO 温度保险丝 -合金型	• P • Q	• 一次性过温保护 • 断开温度精确 ± 2 °C • 密封结构、高可靠性 • 低阻抗, ≤ 10 mΩ • 径向/轴向结构 • 结构紧凑, 尺寸小 • T_f、I_f、U_f范围广 • 符合RoHS & REACH	• 标称放电电流 (I_n) (8/20 μs): 12 ~ 15 kA • 最大放电电流 (I_{max}) (8/20 μs): 25 ~ 30 kA • 额定动作温度 (T_f): 115 ~ 136 °C • 额定电流 (I_r): 20 ~ 25 A	19
	进一步了解 P: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/P-series.html Q: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/Q-series.html			

T3 防雷元器件 赛尔特解决方案产品




赛尔特产品	系列	特色	特点	页码
MOV 压敏电阻 -标准型	• SFV14D • SFV20D • SFV25D • SFV53D • SFV14D T • SFV20D T • SFV25D T	• 环氧树脂封装 • 硅树脂封装 • 低泄漏电流 • 无极性，对称的伏安特性 • 符合RoHS & REACH	• 最大连续工作电压 (VAC): 14 ~ 750 V • 最大峰值电流 (I_{max}) (8/20 μs): 2 ~ 70 kA • 上限类别温度 (UCT): 85 °C / 105 °C / 125 °C	03 ~ 04
	进一步了解 SFV14D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV14D-series.html SFV20D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV20D-series.html SFV25D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV25D-series.html SFV53D: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV53D-series.html SFV14D T: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV14D-T-series.html SFV20D T: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV20D-T-series.html SFV25D T: https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV25D-T-series.html			
TFV 热保护型 压敏电阻 - 环氧封装型	• TFV10S • TFV15S	• 专利产品 • 具有热保护功能的压敏电阻 • 热保护元件内置，更省空间 • 三引线版本可用于指示用途 • 低漏电流 • 满足RoHS & REACH要求	• 最大连续工作电压 (VAC): 50 ~ 510 V • 最大峰值电流 (I_{max})(8/20 μs): 5 / 10 kA • 上限类别温度 (UCT): 105 °C	05
	进一步了解 TFV10S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-Varistor-TFV/TFV10S-series.html TFV15S: https://www.setsafe.cn/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-Varistor-TFV/TFV15S-series.html			
GDT 气体放电管	• SD • SE • SF • TZ • TR • SC • SN • SK	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 70 ~ 4500 V • 冲击放电电流 (I_n) (8/20 μs): 3 / 5 / 10 / 20 kA	09 ~ 11
	进一步了解 SD (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SD-SMD-series.html SD (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SD-L-series.html SF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SF-series.html SE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SE-series.html TZ (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TZ-SMD-series.html TZ (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TZ-L-series.html TR (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TR-SMD-series.html TR (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TR-L-series.html SC: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SC-series.html SN: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SN-series.html SK: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SK-series.html			

T3 防雷元器件 赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
TVS 瞬态电压抑制 二极管-标准型	• SPC6 • SPC10 • SPCL3 • SPCL6 • SPCL10 • SPCL15	• 快速响应 • 玻璃钝化保护 • 优异的箝位性能 • 低浪涌电阻 • 小型化紧凑封装 • 符合IEC 61000-4-2标准的数据线路的ESD保护 • 符合IEC 61000-4-4标准的数据线路的EFT保护 • 封装材料阻燃等级94 V-0 • 无卤素，符合RoHS要求	• 反向关断电压 (V_R): 15 ~ 430) V • 额定峰值脉冲电流 (I_{PP}) (8/20 μs): 3 / 6 / 10 / 15 kA	12 ~ 13
	进一步了解 SPC6: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPC6-series.html SPC10: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPC10-series.html SPCL3: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL3-series.html SPCL6: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL6-series.html SPCL10: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL10-series.html SPCL15: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL15-series.html			
TSS 电涌抑制 晶闸管	• SP0080TALC • SP0080TBLC • SPxxxSA • SPxxxSB • SPxxxSC • SPxxxSD • SP0080SDT • SP0080SDT-3L	• 电容值更低 • 薄型封装 (低剖面封装) • 导通电压低 • 瞬态浪涌吸收能力优异 • 浪涌电压响应速度快 • 湿敏等级: 1 级 • 无退化特性 (性能不会随使用逐渐衰减) • 阻燃等级: UL 94 V-0 • 无卤素，符合RoHS要求	• 断态重复峰值电压 (V_{DRM}): 6 ~ 440 V • 电容 (C): 3 ~ 700 pF • 浪涌承受等级: 2 ~ 8 kV @ 10/700 μs • 最大峰值脉冲电流 (I_{PP}) (10/1000 μs): 35 ~ 3450 A	17 ~ 18
	进一步了解 SP0080TALC: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080TALC-series.html SP0080TBLC: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080TBLC-series.html SPxxxSA: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSA-series.html SPxxxSB: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSB-series.html SPxxxSC: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSC-series.html SPxxxSD: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSD-series.html SP0080SDT: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080SDT-series.html SP0080SDT-3L: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080SDT-3L-series.html			
ATCO 温度保险丝 -合金型	• P • Q • X • Y • S • T • TM	• 一次性过温保护 • 断开温度精确 $\pm 2^\circ\text{C}$ • 密封结构、高可靠性 • 低阻抗, $\leq 10\text{ m}\Omega$ • 径向/轴向结构 • 结构紧凑, 尺寸小 • T_F、I_F、U_F范围广 • 符合RoHS & REACH	• 标称放电电流 (I_n) (8/20 μs): 3 ~ 15 kA • 最大放电电流 (I_{max}) (8/20 μs): 6 ~ 30 kA • 开路电压 (U_{oc}) (1.2/50 μs): 6 kV • 额定动作温度 (T_I): 115 ~ 150 $^\circ\text{C}$ • 额定电流 (I_I): 3 ~ 25 A	19 ~ 20
	进一步了解 P: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/P-series.html Q: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/Q-series.html X: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/X-series.html Y: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/Y-series.html S: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/S-series.html T: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/T-series.html TM: https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/TM-series.html			

信号电涌保护器(SPD)用防雷元件 赛尔特解决方案产品

4 数据网络SPD用

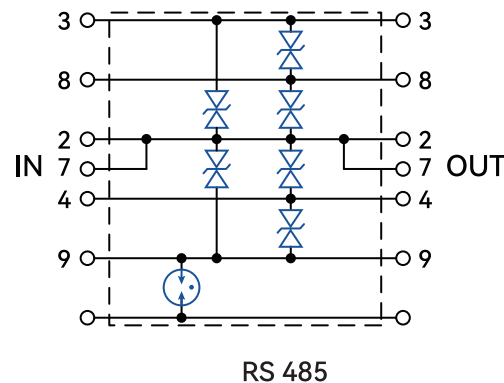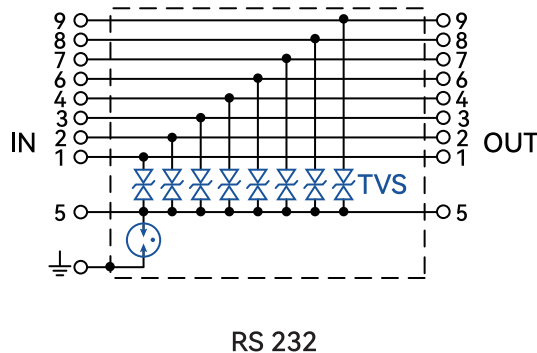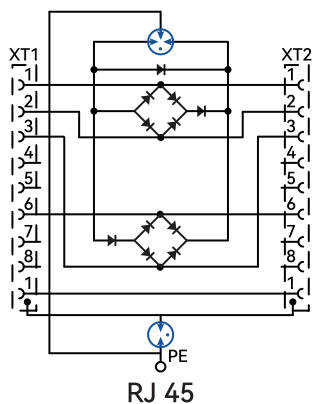

赛尔特解决方案产品



气体放电管 (GDT)






瞬态电压抑制二极管 (TVS)
-标准型



静电阻抗器 (ESD TVS)

5 电信信号SPD用

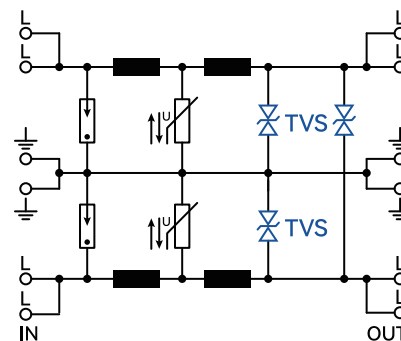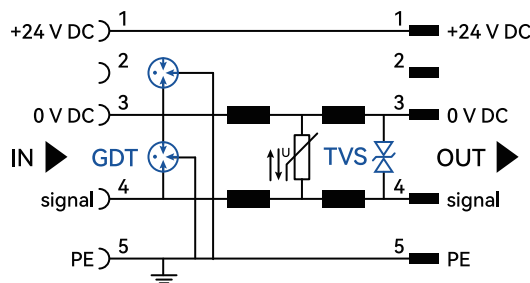

赛尔特解决方案产品




气体放电管 (GDT)



瞬态电压抑制二极管 (TVS)
-标准型

6 射频同轴SPD用

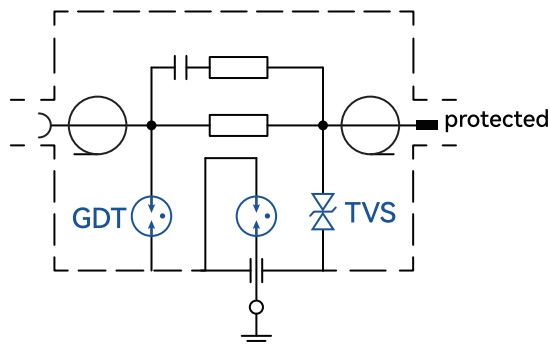

赛尔特解决方案产品



气体放电管 (GDT)



电涌抑制晶闸管 (TSS)

4 数据网络SPD用防雷元件

赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
GDT 气体放电管	• SD • SF • SE • TZ • TR • SN • SK	• SZ • SW • SX • SY • SU • SS • TB	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 75 ~ 1500 V • 冲击放电电流 (I_n) (8/20 μs): 0.5 ~ 20 kA
	进一步了解 SD (SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SD-SMD-series.html SD (L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SD-L-series.html SF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SF-series.html SE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SE-series.html TZ (SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TZ-SMD-series.html TZ (L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TZ-L-series.html TR (SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TR-SMD-series.html TR (L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TR-L-series.html SN: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SN-series.html SK: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SK-series.html SZ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SZ-series.html SW: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SW-series.html SX: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SX-series.html SY: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SY-series.html SU: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SU-series.html SS: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SS-series.html TB: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TB-series.html			
TVS 瞬态电压抑制 二极管-标准型	• SMF • P4SMF • SMAJ • SMA6J • SACB • SMBJ • P6SMB • SMCJ • 1.5SMCJ • 3.0SMCJ • SMDJ	• 快速响应 • 玻璃钝化保护 • 优异的箝位性能 • 低浪涌电阻 • 小型化紧凑封装 • 符合IEC 61000-4-2标准的 数据线路的ESD保护 • 符合IEC 61000-4-4标准的 数据线路的EFT保护 • 封装材料阻燃等级94 V-0 • 无卤素, 符合RoHS要求	• 反向关断电压 (V_R): 5 ~ 550 V • 额定峰值脉冲功率 (P_{PPM}) (10/1000 μs): 200 ~ 3000 W	
	进一步了解 SMF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMF-series.html P4SMF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P4SMF-series.html SMAJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMAJ-series.html SMA6J: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMA6J-series.html SACB: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SACB-series.html SMBJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMBJ-series.html P6SMB: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P6SMB-series.html SMCJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMCJ-series.html 1.5SMCJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/1.5SMCJ-series.html 3.0SMCJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/3.0SMCJ-series.html SMDJ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMDJ-series.html			
ESD TVS 静电电阻器	• SD0508T26U1 • SDxxxxD32U • SDxxxxT23G1 • SD7121T723G	• 钳位电压低 • 泄漏电流小 • 保证高温焊接性能: 260°C /10 秒 • 保证高温回流焊性能: 260°C /10 秒 • 湿敏等级 1 (MSL1) • 阻燃等级: UL 94 V-0 级 • 符合 RoHS	• 反向关断电压 (V_R): 5 ~ 36 V • 电容 (C_j): 0.5 ~ 300 pF	
	进一步了解 SD0508T26U1: https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SD0508T26U1-series.html SDxxxxD32U: https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SDxxxxD32U-series.html SDxxxxT23G1: https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SDxxxxT23G1-series.html SD7121T723G: https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SD7121T723G-series.html			

电信信号SPD用防雷元件

赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
GDT 气体放电管	• SD • SF • SE • TZ • TR • SN • SK	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 75 ~ 1500 V • 冲击放电电流 (I_n) (8/20 μs): 0.5 ~ 20 kA	09 ~ 12
	进一步了解 SD (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SD-SMD-series.html SD (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SD-L-series.html SF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SF-series.html SE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SE-series.html TZ (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TZ-SMD-series.html TZ (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TZ-L-series.html TR (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TR-SMD-series.html TR (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TR-L-series.html SN: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SN-series.html SK: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SK-series.html SZ: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SZ-series.html SW: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SW-series.html SX: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SX-series.html SY: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SY-series.html SU: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SU-series.html SS: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SS-series.html TB: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TB-series.html			
TVS 瞬态电压抑制 二极管-标准型	• SPCL3 • SPCL6 • P4KE • SAC • P6KE • 1.5KE • LCE • 15KPA • 20KPA • 30KPA • SPC1	• 快速响应 • 玻璃钝化保护 • 优异的箝位性能 • 低浪涌电阻 • 小型化紧凑封装 • 符合IEC 61000-4-2标准的 数据线路的ESD保护 • 符合IEC 61000-4-4标准的 数据线路的EFT保护 • 封装材料阻燃等级94 V-0 • 无卤素, 符合RoHS要求	• 反向关断电压 (V_R): 5 ~ 530 V • 额定峰值脉冲功率 (P_{PPM}) (10/1000 μs): 400 ~ 30000 W • 额定峰值脉冲电流 (I_{PP}) (8/20 μs): 1 ~ 10 kA	12 ~ 16
	进一步了解 SPCL3: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL3-series.html SPCL6: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL6-series.html P4KE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P4KE-series.html SAC: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SAC-series.html P6KE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P6KE-series.html 1.5KE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/1.5KE-series.html LCE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/LCE-series.html 15KPA: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/15KPA-series.html 20KPA: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/20KPA-series.html 30KPA: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/30KPA-series.html SPC1: https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL1-series.html			

6 射频同轴SPD用防雷元件

赛尔特解决方案产品

赛尔特产品	系列	特色	特点	页码
GDT 气体放电管	• SD • SF • SE	• 快速响应 • 性能稳定 • 高通流 • 低电容 • 高绝缘 • 符合RoHS & REACH	• 直流击穿电压 (V_s): 90 ~ 800 V • 冲击放电电流 (I_n) (8/20 μs): 5 ~ 20 kA	09 ~ 10
	进一步了解 SD (-SMD): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SD-SMD-series.html SD (-L): https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SD-L-series.html SF: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SF-series.html SE: https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SE-series.html			
TSS 电涌抑制晶闸管	• SPxxxSA • SPxxxSB • SPxxxSC • SPxxxSD	• 电容值更低 • 薄型封装 (低剖面封装) • 导通电压低 • 瞬态浪涌吸收能力优异 • 浪涌电压响应速度快 • 湿敏等级: 1 级 • 无退化特性 (性能不会随使用逐渐衰减) • 阻燃等级: UL 94 V-0 • 无卤素, 符合RoHS要求	• 断态重复峰值电压 (V_{DRM}): 6 ~ 440 V • 电容 (C_j): 20 ~ 150 pF • 浪涌承受等级: 4 ~ 8 kV @ 10/700 μs • 最大峰值脉冲电流 (I_{PP}) (10/1000 μs): 80 ~ 200 A	18
	进一步了解 SPxxxSA: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSA-series.html SPxxxSB: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSB-series.html SPxxxSC: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSC-series.html SPxxxSD: https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxSD-series.html			

赛尔特防雷元件产品

压敏电阻芯片 (MOV) - 防雷型

T1



进一步了解

YMJ34S T型

最大连续工作电压 (VAC): 150 ~ 680 V

最大连续工作电压 (VDC): 200 ~ 895 V

冲击放电电流 (I_{imp}) (10/350 μ s): 3.5 ~ 8.0 kA

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大峰值电流 (I_{max}) (8/20 μ s): 40 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ34S-T-series.html>

T1



进一步了解

YMJ33R T型

最大连续工作电压 (VAC): 150 ~ 680 V

最大连续工作电压 (VDC): 200 ~ 895 V

冲击放电电流 (I_{imp}) (10/350 μ s): 4.0 ~ 7.0 kA

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大峰值电流 (I_{max}) (8/20 μ s): 40 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ33R-T-series.html>

T1



进一步了解

YMJ36R T型

最大连续工作电压 (VAC): 150 ~ 680 V

最大连续工作电压 (VDC): 200 ~ 895 V

冲击放电电流 (I_{imp}) (10/350 μ s): 5.0 ~ 8.5 kA

标称放电电流 (I_n) (8/20 μ s): 25 kA

最大峰值电流 (I_{max}) (8/20 μ s): 50 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ36R-T-series.html>

T1



进一步了解

YMJ40R T型

最大连续工作电压 (VAC): 150 ~ 680 V

最大连续工作电压 (VDC): 200 ~ 895 V

冲击放电电流 (I_{imp}) (10/350 μ s): 6.5 ~ 12.5 kA

标称放电电流 (I_n) (8/20 μ s): 30 kA

最大峰值电流 (I_{max}) (8/20 μ s): 60 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T1-Lightning-Protection-Type/YMJ40R-T-series.html>

赛尔特防雷元件产品

压敏电阻芯片 (MOV) - 防雷型

T2



进一步了解

YMJ25D 系列

最大连续工作电压 (VAC): 130 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 10 kA

最大峰值电流 (I_{max}) (8/20 μ s): 20 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ25D-series.html>

T2



进一步了解

YMJ25S 系列

最大连续工作电压 (VAC): 50 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 10 kA

最大峰值电流 (I_{max}) (8/20 μ s): 25 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/YMJ25S-series.html>

T2



YMJ25S (直流) 系列

最大连续工作电压 (VDC): 170 ~ 1000 V

标称放电电流 (I_n) (8/20 μ s): 10 kA

最大峰值电流 (I_{max}) (8/20 μ s): 25 kA

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T2



YMJ25S (高通流) 系列

最大连续工作电压 (VAC): 130 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 12.5 kA

最大峰值电流 (I_{max}) (8/20 μ s): 27.5 kA

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T2



进一步了解

YMJ34S 系列

最大连续工作电压 (VAC): 50 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大峰值电流 (I_{max}) (8/20 μ s): 40 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/YMJ34S-series.html>

T2



YMJ34S (直流) 系列

最大连续工作电压 (VDC): 200 ~ 1000 V

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大峰值电流 (I_{max}) (8/20 μ s): 40 kA

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

赛尔特防雷元件产品

压敏电阻芯片 (MOV) - 防雷型

T2



YMJ34S (高通流) 系列


最大连续工作电压 (VDC): 150 ~ 550 V

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大峰值电流 (I_{max}) (8/20 μ s): 50 kA

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T2



进一步了解

YMJ37S 系列

最大连续工作电压 (VAC): 150 ~ 750 V


标称放电电流 (I_n) (8/20 μ s): 30 kA

最大峰值电流 (I_{max}) (8/20 μ s): 60 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ37S-series.html>

T2



进一步了解

YMJ40S 系列

最大连续工作电压 (VAC): 150 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 40 kA

最大峰值电流 (I_{max}) (8/20 μ s): 80 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ40S-series.html>

T2



进一步了解

YMJ53D 系列

最大连续工作电压 (VAC): 150 ~ 750 V

标称放电电流 (I_n) (8/20 μ s): 35 kA

最大峰值电流 (I_{max}) (8/20 μ s): 70 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/T2-Lightning-Protection-Type/YMJ53D-series.html>

压敏电阻 - 标准型

T3



进一步了解

SFV14D 系列

最大连续工作电压 (VAC): 14 ~ 750 V

最大峰值电流 (I_{max}) (8/20 μ s): 2 ~ 6 kA

上限类别温度 (UCT): 105 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV14D-series.html>

T3



进一步了解

SFV20D 系列

最大连续工作电压 (VAC): 14 ~ 750 V

最大峰值电流 (I_{max}) (8/20 μ s): 3 ~ 10 kA

上限类别温度 (UCT): 105 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Varistor-MOV-and-MOV-Disk/Standard-Type/SFV20D-series.html>

赛尔特防雷元件产品

压敏电阻 (MOV) - 标准型

T3



进一步了解

SFV25D 系列

最大连续工作电压 (VAC): 14 ~ 750 V
最大峰值电流 (I_{max}) (8/20 μ s): 3 ~ 20 kA
上限类别温度 (UCT): 85 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/SFV25D-series.html>

T3



进一步了解

SFV53D 系列

最大连续工作电压 (VAC): 50 ~ 750 V
最大峰值电流 (I_{max}) (8/20 μ s): 70 kA
上限类别温度 (UCT): 85 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/SFV53D-series.html>

T3



进一步了解

SFV14D T 系列

最大连续工作电压 (VAC): 14 ~ 750 V
最大峰值电流 (I_{max}) (8/20 μ s): 2 ~ 6 kA
上限类别温度 (UCT): 125 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/SFV14D-T-series.html>

T3



进一步了解

SFV20D T 系列

最大连续工作电压 (VAC): 14 ~ 750 V
最大峰值电流 (I_{max}) (8/20 μ s): 3 ~ 10 kA
上限类别温度 (UCT): 125 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/SFV20D-T-series.html>

T3



进一步了解

SFV25D T 系列

最大连续工作电压 (VAC): 30 ~ 750 V
最大峰值电流 (I_{max}) (8/20 μ s): 6 ~ 20 kA
上限类别温度 (UCT): 125 °C

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Metal-Oxide-Variistor-MOV-and-MOV-Disk/Standard-Type/SFV25D-T-series.html>

赛尔特防雷器件产品

热保护型压敏电阻 (TFV) - 环氧封装型

T3



进一步了解

TFV10S 系列

最大连续工作电压 (VAC): 50 ~ 510 V

最大峰值电流 (I_{max}) (8/20 μ s): 5 kA

上限类别温度 (UCT): 105 °C

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-Varistor-TFV/TFV10S-series.html>

T3



进一步了解

TFV15S 系列

最大连续工作电压 (VAC): 50 ~ 510 V

最大峰值电流 (I_{max}) (8/20 μ s): 10 kA

上限类别温度 (UCT): 105 °C

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-Varistor-TFV/TFV15S-series.html>

热保护型压敏电阻 (TFMOV) - 熔断合金型

T2



进一步了解

TFMOV15S 系列

最大连续工作电压 (U_c): 17 ~ 510 VAC

标称放电电流 (I_n) (8/20 μ s): 1.5 ~ 5 kA

最大放电电流 (I_{max}) (8/20 μ s): 3 ~ 10 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV15S-series.html>

T2



进一步了解

TFMOV20S 系列

最大连续工作电压 (U_c): 17 ~ 750 VAC


标称放电电流 (I_n) (8/20 μ s): 1.5 ~ 7.5 kA

最大放电电流 (I_{max}) (8/20 μ s): 3 ~ 15 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV20S-series.html>

T2



进一步了解

TFMOV25S 系列

最大连续工作电压 (U_c): 17 ~ 750 VAC


标称放电电流 (I_n) (8/20 μ s): 3 ~ 10 kA

最大放电电流 (I_{max}) (8/20 μ s): 6 ~ 25 kA

进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV25S-series.html>

T2



进一步了解

TFMOV34S 系列

最大连续工作电压 (U_c): 30 ~ 750 VAC

标称放电电流 (I_n) (8/20 μ s): 10 ~ 20 kA

最大放电电流 (I_{max}) (8/20 μ s): 20 ~ 40 kA


进一步了解:

<https://www.setsafe.com/Products/Over-Voltage-Protection/TFV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV34S-series.html>

赛尔特防雷器件产品

热保护型压敏电阻 (TFMOV) - 熔断合金型

T2



进一步了解

TFMOV20SxxxL 系列

最大连续工作电压 (U_c): 30 ~ 420 VAC
标称放电电流 (I_n) (8/20 μ s): 2.5 ~ 7.5 kA
最大放电电流 (I_{max}) (8/20 μ s): 5 ~ 15 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV20SxxxL-series.html>

T2



进一步了解

TFMOV25SxxxL 系列

最大连续工作电压 (U_c): 30 ~ 420 VAC
标称放电电流 (I_n) (8/20 μ s): 4 ~ 10 kA
最大放电电流 (I_{max}) (8/20 μ s): 8 ~ 25 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV25SxxxL-series.html>

T2



进一步了解

TFMOV34SxxxL 系列

最大连续工作电压 (U_c): 30 ~ 420 VAC
标称放电电流 (I_n) (8/20 μ s): 10 ~ 20 kA
最大放电电流 (I_{max}) (8/20 μ s): 20 ~ 40 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV34SxxxL-series.html>

T2



进一步了解


TFMOV21R2P 系列

最大连续工作电压 (U_c): 30 ~ 320 VAC
标称放电电流 (I_n) (8/20 μ s): 2.5 x 2 ~ 7.5 x 2 kA
最大放电电流 (I_{max}) (8/20 μ s): 5 x 2 ~ 15 x 2 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV21R2P-series.html>

T2



进一步了解

TFMOV21R3P 系列

最大连续工作电压 (U_c): 30 ~ 320 VAC
标称放电电流 (I_n) (8/20 μ s): 2.5 x 3 ~ 7.5 x 3 kA
最大放电电流 (I_{max}) (8/20 μ s): 5 x 3 ~ 15 x 3 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV21R3P-series.html>

T2



进一步了解

TFMOV25D 系列

最大连续工作电压 (U_c): 17 ~ 750 VAC
标称放电电流 (I_n) (8/20 μ s): 1.5 ~ 10 kA
最大放电电流 (I_{max}) (8/20 μ s): 3 ~ 20 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV25D-series.html>

赛尔特防雷器件产品

热保护型压敏电阻 (TFMOV) - 熔断合金型

T2



进一步了解

TFMOV20K 系列

最大连续工作电压 (U_c): 50 ~ 750 VAC


标称放电电流 (I_n) (8/20 μ s): 15 ~ 20 kA

最大放电电流 (I_{max}) (8/20 μ s): 30 ~ 50 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV20K-series.html>

T2



进一步了解

TFMOV40K 系列

最大连续工作电压 (U_c): 50 ~ 750 VAC

标称放电电流 (I_n) (8/20 μ s): 30 ~ 40 kA

最大放电电流 (I_{max}) (8/20 μ s): 60 ~ 100 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermal-Fuse-and-MOV-TFMOV/TFMOV40K-series.html>

热保护型压敏电阻 (TFMOV) - 机械脱扣型

T1



进一步了解

TFMOV25M 系列

冲击放电电流 (I_{imp}) (10/350 μ s): 6 ~ 7.5 kA

最大连续工作电压 (U_c): 385 ~ 680 VAC

最大连续工作电压 (U_{cpv}): 505 ~ 900 VDC

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大放电电流 (I_{max}) (8/20 μ s): 40 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermally-Protected-Variators-TFMOV/TFMOV25M-series.html>

T2



进一步了解

TFMOV05M 系列

最大连续工作电压 (U_c): 50 ~ 750 VAC

最大连续工作电压 (U_{cpv}): 65 ~ 1000 VDC

标称放电电流 (I_n) (8/20 μ s): 5 kA

最大放电电流 (I_{max}) (8/20 μ s): 10 kA

开路电压 (U_{oc}) (1.2/50 μ s): 10 kV

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermally-Protected-Variators-TFMOV/TFMOV05M-series.html>

T2



进一步了解

TFMOV10M 系列

最大连续工作电压 (U_c): 50 ~ 680 VAC

最大连续工作电压 (U_{cpv}): 500 ~ 880 VDC

标称放电电流 (I_n) (8/20 μ s): 10 kA

最大放电电流 (I_{max}) (8/20 μ s): 25 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermally-Protected-Variators-TFMOV/TFMOV10M-series.html>

T2



进一步了解

TFMOV20M 系列

最大连续工作电压 (U_c): 50 ~ 750 VAC

最大连续工作电压 (U_{cpv}): 500 ~ 1000 VDC

标称放电电流 (I_n) (8/20 μ s): 20 kA

最大放电电流 (I_{max}) (8/20 μ s): 40 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/TPV-and-TFMOV/Thermally-Protected-Variators-TFMOV/TFMOV20M-series.html>

赛尔特防雷元件产品

气体放电管 (GDT)

T1



SPO 系列

直流击穿电压 (V_s): 600 / 800 V

冲击放电电流 (I_{imp}) (10/350 μ s): 100 kA

标称冲击放电电流 (I_n) (8/20 μ s): 100 kA

最大放电电流 (I_{max}): 200 kA

尺寸: $\Phi 30.0 \times 30.0$ mm

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T1



进一步了解

SPP 系列

直流击穿电压 (V_s): 600 ~ 800 V

标称冲击放电电流 (I_n) (8/20 μ s): 100 kA

尺寸: $\Phi 30.0 \times 12.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPP-series.html>

T2



进一步了解

SPA 系列

直流击穿电压 (V_s): 350 ~ 1500 V

标称冲击放电电流 (I_n) (8/20 μ s): 20 ~ 40 kA

尺寸: $\Phi 11.8 \times 17.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPK-series.html>

T2



进一步了解

SPB 系列

直流击穿电压 (V_s): 90 ~ 2000 V

标称冲击放电电流 (I_n) (8/20 μ s): 20 kA

尺寸: $\Phi 11.8 \times 6.2$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPB-series.html>

T2



进一步了解

SPC 系列

直流击穿电压 (V_s): 350 ~ 1000 V

标称冲击放电电流 (I_n) (8/20 μ s): 20 kA

尺寸: $\Phi 11.8 \times 4.2$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPC-series.html>

T2



进一步了解

SPH 系列

直流击穿电压 (V_s): 350 ~ 1000 V

标称冲击放电电流 (I_n) (8/20 μ s): 40 kA

尺寸: $\Phi 18.0 \times 6.7$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPH-series.html>

T2



进一步了解

SPI 系列

直流击穿电压 (V_s): 350 ~ 2500 V

标称冲击放电电流 (I_n) (8/20 μ s): 40 kA

尺寸: $\Phi 16.0 \times 8.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPI-series.html>

T2



进一步了解

SPJ 系列

直流击穿电压 (V_s): 150 ~ 1500 V

标称冲击放电电流 (I_n) (8/20 μ s): 20 / 30 kA

尺寸: $\Phi 16.0 \times 4.5$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type-SPJ-series.html>

赛尔特防雷元件产品

气体放电管 (GDT)

T2



进一步了解

SPK 系列

直流击穿电压 (V_s): 90 ~ 800 V
标称冲击放电电流 (I_n)(8/20 μ s): 40 kA
尺寸: $\Phi 15.0 \times 3.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPK-series.html>

T2



进一步了解

SPR 系列

直流击穿电压 (V_s): 600 ~ 3000 V
标称冲击放电电流 (I_n)(8/20 μ s): 40 kA
尺寸: $\Phi 20.0 \times 6.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPR-series.html>

T2



进一步了解

SPS 系列

直流击穿电压 (V_s): 600 ~ 800 V
标称冲击放电电流 (I_n)(8/20 μ s): 80 kA
尺寸: $\Phi 24.0 \times 10.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPS-series.html>

T2



进一步了解

SPV 系列

直流击穿电压 (V_s): 350 ~ 800 V
标称冲击放电电流 (I_n)(8/20 μ s): 40 kA
尺寸: $\Phi 20.0 \times 4.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/High-Surge-Type/SPV-series.html>

T2




SPZ 系列

直流击穿电压 (V_s): 350 ~ 800 V
标称冲击放电电流 (I_n)(8/20 μ s): 40 kA
尺寸: $\Phi 11.8 \times 13.0$ mm

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T2



SPX 系列

直流击穿电压 (V_s): 350 ~ 800 V
标称冲击放电电流 (I_n)(8/20 μ s): 30 kA
尺寸: $\Phi 30.0 \times 3.0$ mm


了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T3

6

4

5



进一步了解

SD (-SMD) 系列

直流击穿电压 (V_s): 70 ~ 800 V
冲击放电电流 (I_n)(8/20 μ s): 5 kA
尺寸: $\Phi 5.4 \times 5.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SD-Type/SD-SMD-series.html>

T3

6

4

5



进一步了解

SD (-L) 系列

直流击穿电压 (V_s): 70 ~ 800 V
冲击放电电流 (I_n)(8/20 μ s): 5 kA
尺寸: $\Phi 5.0 \times 5.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SD-Type/SD-L-series.html>

赛尔特防雷元件产品

气体放电管 (GDT)

T3 6

4

5



SF 系列

直流击穿电压 (V_s): 70 ~ 4500 V

标称冲击放电电流 (I_n)(8/20 μ s): 3 / 5 / 10 kA

尺寸: 6.0 × 6.0 × 6.0 mm

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

T3 6

4

5



进一步了解

SF (-L) 系列

直流击穿电压 (V_s): 70 ~ 4500 V

冲击放电电流 (I_n)(8/20 μ s): 3 / 5 / 10 kA

尺寸: Φ 5.5 × 6.0 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SF-series.html>

T3 6

4

5



进一步了解

SE 系列

直流击穿电压 (V_s): 70 ~ 4500 V

冲击放电电流 (I_n)(8/20 μ s): 5 / 10 / 20 kA

尺寸: Φ 8.0 × 6.0 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/SE-series.html>

T3

4

5



进一步了解

TZ (-SMD) 系列

直流击穿电压 (V_s): 75 ~ 600 V

冲击放电电流 (I_n)(8/20 μ s): 5 / 10 kA

尺寸: 长7.6 × 宽5.0 × 高5.0 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TZ-SMD-series.html>

T3

4

5



进一步了解

TZ (-L) 系列

直流击穿电压 (V_s): 75 ~ 600 V

冲击放电电流 (I_n)(8/20 μ s): 5 / 10 kA

尺寸: Φ 5.0 × 7.6 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TZ-L-series.html>

T3

4

5



进一步了解

TR (-SMD) 系列

直流击穿电压 (V_s): 90 ~ 600 V

冲击放电电流 (I_n)(8/20 μ s): 10 / 20 kA

尺寸: 长10.0 × 宽8.3 × 高8.3 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/TR-SMD-series.html>

T3

4

5



进一步了解

TR (-L) 系列

直流击穿电压 (V_s): 90 ~ 600 V

冲击放电电流 (I_n)(8/20 μ s): 10 / 20 kA

尺寸: Φ 8.0 × 10.0 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TR-L-series.html>

T3



进一步了解

SC 系列

直流击穿电压 (V_s): 70 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 20 kA

尺寸: 长6.0 × 宽8.3 × 高8.3 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SC-series.html>


赛尔特防雷元件产品

气体放电管 (GDT)

T3

4

5



进一步了解

SN 系列

直流击穿电压 (V_s): 70 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 5 kA

尺寸: 长4.2 × 宽5.0 × 高5.0 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SN-series.html>

T3

4

5



进一步了解

SK 系列

直流击穿电压 (V_s): 90 ~ 1000 V

冲击放电电流 (I_n)(8/20 μ s): 10 / 20 kA

尺寸: Φ 8.0 × 2.2 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SK-series.html>

4

5



进一步了解

SZ 系列

直流击穿电压 (V_s): 90 ~ 400 V

冲击放电电流 (I_n)(8/20 μ s): 0.5 kA


尺寸: 长3.2 × 宽1.6 × 高1.6 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SZ-series.html>

4

5



进一步了解

SW 系列

直流击穿电压 (V_s): 75 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 1 kA


尺寸: 长3.2 × 宽2.5 × 高2.5 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SW-series.html>

4

5



进一步了解

SX 系列

直流击穿电压 (V_s): 75 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 1 / 2 kA


尺寸: 长4.5 × 宽3.2 × 高2.7 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SX-series.html>

4

5



进一步了解

SY 系列

直流击穿电压 (V_s): 75 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 3 kA


尺寸: 长4.0 × 宽3.5 × 高3.5 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SY-series.html>

4

5



进一步了解

SU 系列

直流击穿电压 (V_s): 90 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 5 / 10 kA

尺寸: 长5.0 × 宽5.4 × 高5.4 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SU-series.html>

4

5



进一步了解

SS 系列

直流击穿电压 (V_s): 70 ~ 800 V

冲击放电电流 (I_n)(8/20 μ s): 5 kA

尺寸: 长4.2 × 宽6.2 × 高6.2 mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/SMD-Type/SS-series.html>

赛尔特防雷元件产品

气体放电管 (GDT)

4

5



进一步了解

TB 系列

直流击穿电压 (V_s): 90 ~ 600 V

冲击放电电流 (I_n) (8/20 μ s): 5 / 10 kA

尺寸: $\Phi 6.0 \times 8.0$ mm

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Gas-Discharge-Tube-GDT/DIP-Type/TB-series.html>

瞬态电压抑制二极管 (TVS) - 标准型

T2



进一步了解

SPCL20 系列

反向关断电压 (V_R): 16 ~ 76 V

额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 20 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL20-series.html>

T3



进一步了解

SPC6 系列

反向关断电压 (V_R): 58 ~ 76 V

额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 6 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPC6-series.html>

T3



进一步了解

SPC10 系列

反向关断电压 (V_R): 30 ~ 86 V


额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 10 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPC10-series.html>

T3

5



进一步了解

SPCL3 系列

反向关断电压 (V_R): 15 ~ 430 V

额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 3 kA

进一步了解:


<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL3-series.html>

赛尔特防雷元件产品

瞬态电压抑制二极管 (TVS) - 标准型

T3

5



进一步了解


SPCL6 系列

反向关断电压 (V_R): 15 ~ 430 V
额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 6 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL6-series.html>

T3



进一步了解

SPCL10 系列

反向关断电压 (V_R): 15 ~ 530 V
额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 10 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL10-series.html>

T3



进一步了解


SPCL15 系列

反向关断电压 (V_R): 15 ~ 380 V
额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 15 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL15-series.html>

4



进一步了解


SMF 系列

反向关断电压 (V_R): 5.0 ~ 250 V
额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 200 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMF-series.html>

4



进一步了解

P4SMF 系列

反向关断电压 (V_R): 5.0 ~ 85 V
额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 400 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P4SMF-series.html>

4



进一步了解

SMAJ 系列

反向关断电压 (V_R): 5.0 ~ 440 V
额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 400 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMAJ-series.html>

赛尔特防雷元件产品

瞬态电压抑制二极管 (TVS) - 标准型

4



进一步了解

SMA6J 系列


反向关断电压 (V_R): 5.0 ~ 250 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 600 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMA6J-series.html>

4



进一步了解

SACB 系列

反向关断电压 (V_R): 5.0 ~ 50 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SACB-series.html>

4



进一步了解

SMBJ 系列

反向关断电压 (V_R): 5.0 ~ 550 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 600 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMBJ-series.html>

4



进一步了解

P6SMB 系列

反向关断电压 (V_R): 5.8 ~ 512 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 600 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P6SMB-series.html>

4



进一步了解

SMCJ 系列

反向关断电压 (V_R): 5.0 ~ 440 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 1500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMCJ-series.html>

4



进一步了解

1.5SMC 系列

反向关断电压 (V_R): 5.8 ~ 512 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 1500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/1.5SMC-series.html>

赛尔特防雷元件产品

瞬态电压抑制二极管 (TVS) - 标准型

4



进一步了解

3.0SMCJ 系列

反向关断电压 (V_R): 5.0 ~ 440 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 3000 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/3.0SMCJ-series.html>

4



进一步了解

SMDJ 系列

反向关断电压 (V_R): 5.0 ~ 440 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 3000 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SMDJ-series.html>

5



进一步了解

P4KE 系列

反向关断电压 (V_R): 5.8 ~ 468 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 400 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P4KE-series.html>

5



进一步了解

SAC 系列

反向关断电压 (V_R): 5.0 ~ 50 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SAC-series.html>

5



进一步了解

P6KE 系列

反向关断电压 (V_R): 5.8 ~ 512 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 600 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/P6KE-series.html>

5



进一步了解

1.5KE 系列

反向关断电压 (V_R): 5.8 ~ 512 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 1500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/1.5KE-series.html>

赛尔特防雷元件产品

瞬态电压抑制二极管 (TVS) - 标准型

5



进一步了解

LCE 系列


反向关断电压 (V_R): 6.5 ~ 90 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 1500 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/LCE-series.html>

5



进一步了解

15KPA 系列

反向关断电压 (V_R): 17 ~ 280 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 15000 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/15KPA-series.html>

5



进一步了解

20KPA 系列

反向关断电压 (V_R): 20 ~ 300 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 20000 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/20KPA-series.html>

5



进一步了解

30KPA 系列


反向关断电压 (V_R): 28 ~ 360 V

额定峰值脉冲功率 (P_{PPM}) (10/1000 μ s): 30000 W

进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/30KPA-series.html>

5



进一步了解

SPCL1 系列

反向关断电压 (V_R): 66 ~ 430 V

额定峰值脉冲电流 (I_{PP}) (8/20 μ s): 1 kA


进一步了解:

<https://www.setsafe.cn/Products/Over-Voltage-Protection/Transient-Voltage-Suppression-Diodes-TVS/TVS-Standard-Type/SPCL1-series.html>

赛尔特防雷元件产品

静电阻抗器 (ESD TVS)

4



进一步了解

SD0508T26U1 系列

反向关断电压 (V_{RWM}): 5 V


电容 (C_j): 0.5 pF

特性: IEC61000-4-2 (ESD) ± 25 kV (air),
 ± 20 kV (contact)

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SD0508T26U1-series.html>

4



进一步了解

SDxxxxD32U 系列

反向关断电压 (V_{RWM}): 3.3 ~ 24 V


电容 (C_j): 1.0 pF

特性: IEC61000-4-2 (ESD) ± 30 kV (air),
 ± 30 kV (contact)

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SDxxxxD32U-series.html>

4



进一步了解

SDxxxxT23G1 系列

反向关断电压 (V_{RWM}): 3.3 ~ 36 V


电容 (C_j): 60 ~ 300 pF

特性: IEC61000-4-2 (ESD) ± 30 kV (air),
 ± 30 kV (contact)

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SDxxxxT23G1-series.html>

4



进一步了解

SD71217T23G 系列

反向关断电压 (V_{RWM}): 12 / 7 V

电容 (C_j): 75 pF

特性: IEC61000-4-2 (ESD) ± 15 kV (air),
 ± 8 kV (contact)

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/ESD-TVS-Diode-Arrays/SD71217T23G-series.html>

电涌抑制晶闸管 (TSS)

T3



进一步了解

SP0080TALC 系列

断态重复峰值电压 (V_{DRM}): 6 V

电容 (C_j): 10 pF

浪涌承受等级: 2 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 35 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080TALC-series.html>

T3



进一步了解

SP0080TBLC 系列

断态重复峰值电压 (V_{DRM}): 6 V

电容 (C_j): 30 pF

浪涌承受等级: 4 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 80 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080TBLC-series.html>

赛尔特防雷元件产品

电涌抑制晶闸管 (TSS)

T3

6



进一步了解

SPxxxxSA 系列

断态重复峰值电压 (V_{DRM}): 58 ~ 340 V

电容 (C.): 20 ~ 35 pF

浪涌承受等级 4 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 80 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxxSA-series.html>

T3

6



进一步了解

SPxxxxSB 系列

断态重复峰值电压 (V_{DRM}): 6 ~ 400 V

电容 (C.): 25 ~ 50 pF

浪涌承受等级: 4 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 80 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxxSB-series.html>

T3

6



进一步了解

SPxxxxSC 系列

断态重复峰值电压 (V_{DRM}): 6 ~ 440 V

电容 (C.): 35 ~ 60 pF

浪涌承受等级: 6 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 100 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxxSC-series.html>

T3

6



进一步了解

SPxxxxSD 系列

断态重复峰值电压 (V_{DRM}): 6 ~ 400 V

电容 (C.): 40 ~ 150 pF

浪涌承受等级: 8 kV @ 10/700 μ s

最大峰值脉冲电流 (I_{PP}) (10/1000 μ s): 200 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SPxxxxSD-series.html>

T3



进一步了解

SP0080SDT 系列

断态重复峰值电压 (V_{DRM}): 6 V

电容 (C.): 500 pF

浪涌承受等级: 6 kV @ 1.2/50 μ s

最大峰值脉冲电流 (I_{PP}) (8/20 μ s): 3300 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080SDT-series.html>

T3



进一步了解

SP0080SDT-3L 系列

断态重复峰值电压 (V_{DRM}): 6 V

电容 (C.): 700 pF

浪涌承受等级 6 kV @ 1.2/50 μ s

最大峰值脉冲电流 (I_{PP}) (8/20 μ s): 3450 A

进一步了解:

<https://www.setsafe.cn/Product/Over-Voltage-Protection/Thyristor-Surge-Suppressors-TSS/SP0080SDT-3L-series.html>

赛尔特防雷元件产品

低压熔断器 (LV Fuses) – 防雷器用

T1



进一步了解

LFS14 系列

额定电压: 400 / 690 VAC

冲击放电电流 (I_{imp}) (10/350 μ s): 10 kA

标称放电电流 (I_n) (8/20 μ s): 25 kA

分断能力: 50 kA

进一步了解:

<https://www.setsafe.cn/Products/Over-Current-Protection/Low-Voltage-Fuses-LV-Fuses/LV-Fuses-for-Lightning-Protection/LFS14-series.html>

T2



LFR10-xA04-y 系列

额定电压: 400 VAC

分断能力: 50 kA

标称放电电流 (I_n) (8/20 μ s): 10 ~ 20 kA

了解更多信息, 请联系销售人员, 邮箱: sales@SETfuse.com

温度保险丝 (ATCO) – 合金型

T2

T3



进一步了解

P 系列

标称放电电流 (I_n) (8/20 μ s): 12 kA

最大放电电流 (I_{max}) (8/20 μ s): 25 kA

额定动作温度 (T_i): 115 ~ 136 °C

额定电流 (I_r): 20 A


额定电压 (U_r): 250 / 300 / 400 VAC, 120 VDC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/P-series.html>

T2

T3



进一步了解

Q 系列

标称放电电流 (I_n) (8/20 μ s): 15 kA

最大放电电流 (I_{max}) (8/20 μ s): 30 kA

额定动作温度 (T_i): 115 ~ 136 °C

额定电流 (I_r): 25 A

额定电压 (U_r): 250 / 300 / 400 VAC, 120 VDC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/Q-series.html>

赛尔特防雷元件产品

温度保险丝 (ATCO) - 合金型

T3



进一步了解


X 系列

开路电压 (U_{oc}) (1.2/50 μ s): 6 kV
额定动作温度 (T_i): 115 ~ 150 °C
额定电流 (I_t): 3 A / 250 VAC, 4 A / 60 VDC
额定电压 (U_r): 250 VAC, 60 VDC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/X-series.html>

T3



进一步了解


Y 系列

标称放电电流 (I_n) (8/20 μ s): 3 kA
最大放电电流 (I_{max}) (8/20 μ s): 6 kA
额定动作温度 (T_i): 115 ~ 150 °C
额定电流 (I_t): 5 A
额定电压 (U_r): 250 / 300 VAC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/Y-series.html>

T3



进一步了解


S 系列

标称放电电流 (I_n) (8/20 μ s): 5 kA
最大放电电流 (I_{max}) (8/20 μ s): 10 kA
额定动作温度 (T_i): 115 ~ 150 °C
额定电流 (I_t): 10 A
额定电压 (U_r): 125 / 250 VAC, 100 VDC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/S-series.html>

T3



进一步了解


T 系列

标称放电电流 (I_n) (8/20 μ s): 6 kA
最大放电电流 (I_{max}) (8/20 μ s): 12 kA
额定动作温度 (T_i): 115 ~ 150 °C
额定电流 (I_t): 15 / 16 A
额定电压 (U_r): 125 / 250 VAC, 100 VDC

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/T-series.html>

T3



进一步了解

TM 系列

标称放电电流 (I_n) (8/20 μ s): 6 kA
最大放电电流 (I_{max}) (8/20 μ s): 12 kA
额定动作温度 (T_i): 115 ~ 150 °C
额定电流 (I_t): 15 / 16 A
额定电压 (U_r): 300 VA

进一步了解:

<https://www.setsafe.cn/Products/Over-Temperature-Protection/Thermal-Link-ATCO-Alloy-Type/TM-series.html>

赛尔特电涌保护器(SPD)检测能力

8/20 μ s & 10/350 μ s 冲击电流试验系统



电流输出波形: 8/20 μ s, 10/350 μ s

电流输出范围: 10 ~ 240 kA (8/20 μ s),
4 ~ 45 kA (10/350 μ s)

直流短路电流试验系统



直流电压范围: 0 ~ 1500 V

直流电流范围: 20 ~ 250 A

纹波系数: $\leq 1\%$

模拟失效综合测试设备



交流电压范围: 120 ~ 1200 V

交流电流范围: 1 ~ 1500 A

功率因素: 0.6 ~ 1.0

实验室资质



赛尔特产品类别与产品



过温度保护
<https://www.SETsafe.cn/Products/Over-Temperature-Protection.html>



过电压保护
<https://www.SETsafe.cn/Products/Over-Voltage-Protection.html>



过电流保护
<https://www.SETsafe.cn/Products/Over-Current-Protection.html>



主动保护
<https://www.SETsafe.cn/Products/Active-Protections.html>

赛尔特产品目录下载



<https://www.SETsafe.cn/Support/Datasheet-Download.html>

赛尔特社交账号



抖音ID
SETsafe_SETfuse



微信视频号
SETfuse赛尔特



小红书ID
1441276597



bilibili ID
赛尔特SETfuse

厦门赛尔特电子股份有限公司

福建省 厦门市 翔安区 翔安西路8067, 8001号
电话: 0592 5715838
邮箱: sales@SETfuse.com



官网
www.SETsafe.com
www.SETfuse.com



公众号