

# TVS Diodes

Transient Voltage Suppression Diodes

**SPCL20 Series (20 kA)**



## Description

The SPCL 20 series of high power TVS diode is specially designed for meeting severe surge test environment of both AC and DC line protection applications. The SPCL 20 features a very fast response and ultra low clamping characteristics as compared to MOVs (Metal Oxide Varistors). These SPCL components can be connected in series and / or parallel to create a very high surge current protection solution.

## Applications

- Communication Equipment
- Security & Protection
- Industrial Control Equipment
- Power Supply
- Automotive Electronics
- New Energy
- Surge Protection

## Features

- Very low clamping voltage
- Sharp breakdown voltage
- Low slope resistance
- Bi-directional
- Snapback technology for superior clamping factor
- Symmetric in leads width for easier soldering during Assembly.
- IEC-61000-4-2 ESD 30 kV (Air), 30 kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Surge protection of lightning in accordance with IEC61000-4-5
- Halogen-free
- RoHS compliant
- Glass passivated junction
- Pb-free E4 means 2<sup>nd</sup> level interconnect is Pb-free and the terminal finish material is Silver

## Functional Diagram




Bi-Directional

# TVS Diodes

Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)

## Package Outline Dimensions

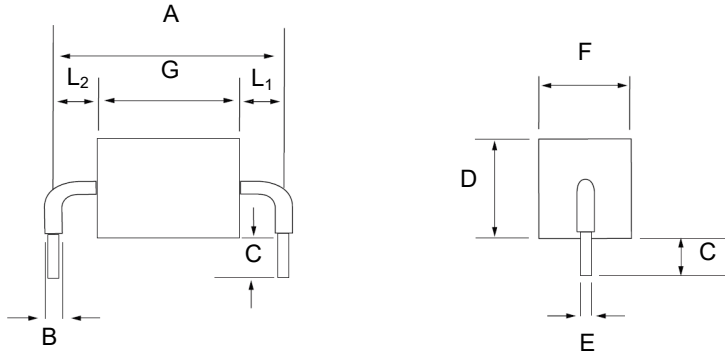


Symbol	Millimeters	Inches
A	24.15 ± 0.80	0.95 ± 0.03
B	2.50 ± 0.70	0.100 ± 0.028
C	6.00 ± 1.00	0.236 ± 0.04
D	15.50 ± 1.40	0.611 ± 0.055
E	1.28 ± 0.05	0.051 ± 0.002
F	14.90 ± 1.40	0.587 ± 0.055
G - 016C	4.00 Max.	0.157 Max.
G - 058C / 066C / 076C	7.80 Max.	0.307 Max.
G - 076C - F	8.50 Max.	0.335 Max.
L <sub>1</sub> / L <sub>2</sub>	L <sub>1</sub> = L <sub>2</sub> Tolerance ± 1.0 mm (0.04 inch)	

# TVS Diodes


Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)


## Part Numbering System

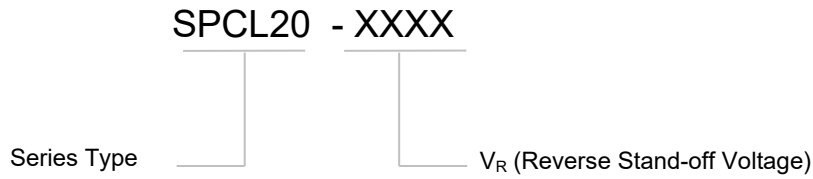

## Marking

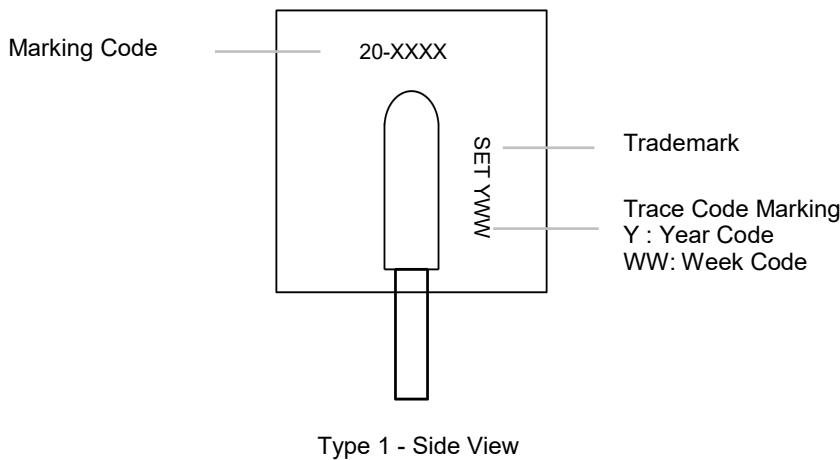

Apply to P/N
SPCL20 - 016C
SPCL20 - 058C
SPCL20 - 066C
SPCL20 - 076C

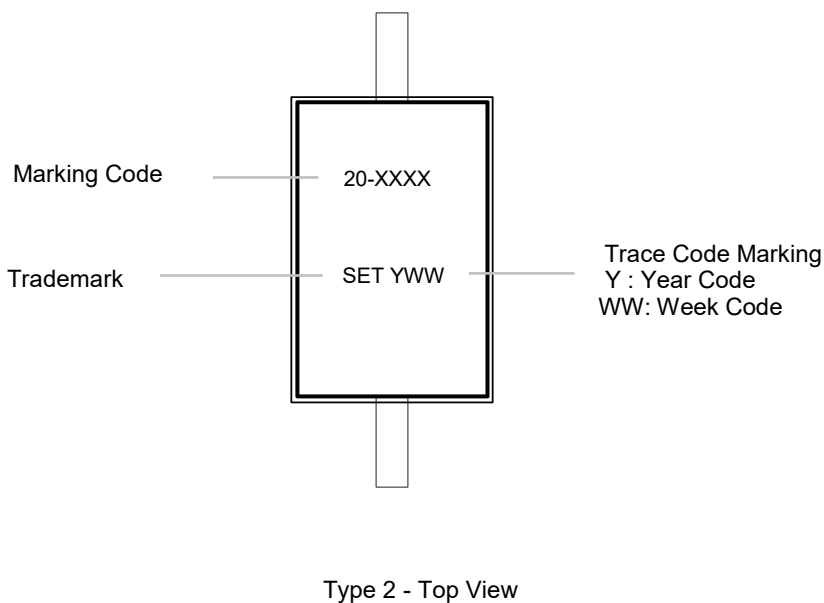

Apply to P/N
SPCL20 - 076C-F

# TVS Diodes

Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)

## Electrical Characteristics (T<sub>A</sub>=25 °C unless otherwise noted )

Part Number	Device Marking Code	Breakdown Voltage V <sub>BR@I<sub>T</sub></sub>		Test Current I <sub>T</sub>	Stand-off Voltage V <sub>R</sub>	Max. Reverse Leakage I <sub>R@V<sub>R</sub></sub>	Typical I <sub>R</sub> @85°C	Max. Clamping Voltage V <sub>CL</sub> @ I <sub>pp</sub> Peak Pulse Current (I <sub>pp</sub> )			Max. Temp Coefficient OF V <sub>BR</sub>	Typ. Capacitance 0 Bias 10kHz
		Min	Max					I <sub>pp</sub> (8/20 μs) (A)	I <sub>pp</sub> (10/350 μs) (A)	V <sub>CL</sub> (V)		
		(V)		(mA)	(V)	(μA)	(μA)				(%/°C)	(nF)
SPCL20 - 016C	20 - 016C	17.5	19.3	10	16	5	15	20000	3200	30	0.1	50
SPCL20 - 058C	20 - 058C	64.0	70.0	10	58	5	15	20000	3200	120	0.1	15
SPCL20 - 066C	20 - 066C	72.0	80.0	10	66	5	15	20000	3200	130	0.1	12
SPCL20 - 076C	20 - 076C	85.0	95.0	10	76	5	15	20000	3200	160	0.1	12
SPCL20 - 076C - F	20 - 076C - F	85.0	95.0	10	76	5	15	20000	3200	160	0.1	12

Note :  
Using 8/20 μs wave shape as defined in IEC 61000-4-5.

## Maximum Ratings and Characteristics

(T<sub>A</sub> = 25 °C unless otherwise specified.)

Parameter	Symbol	Value	Unit
Operating Storage Temperature Range	T <sub>STG</sub>	-55 to 150	°C
Operating Junction Temperature Range	T <sub>J</sub>	-55 to 125	°C
Current Rating (Note 1)	I <sub>pp</sub>	20	kA

Note:  
Rated I<sub>pp</sub> measured with 8/20 μs pulse.

# TVS Diodes

Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

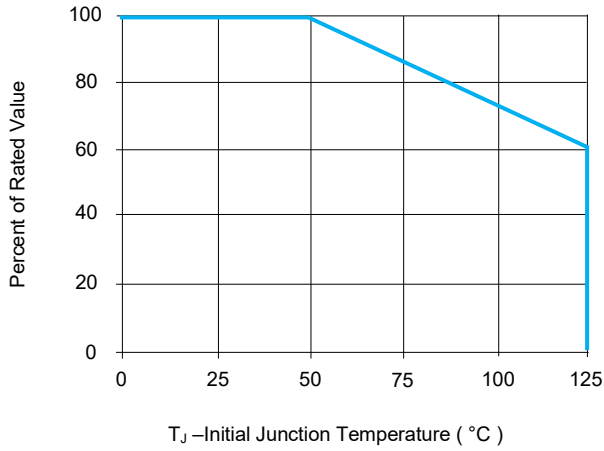


FIGURE 1 Peak Pulse Power Derating Curve

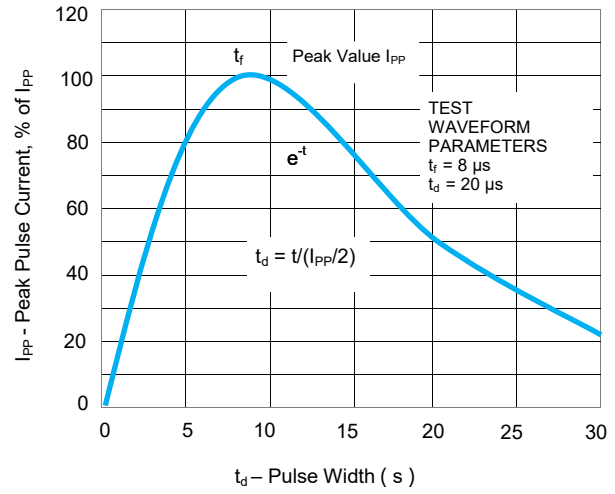


FIGURE 2 Pulse Waveform

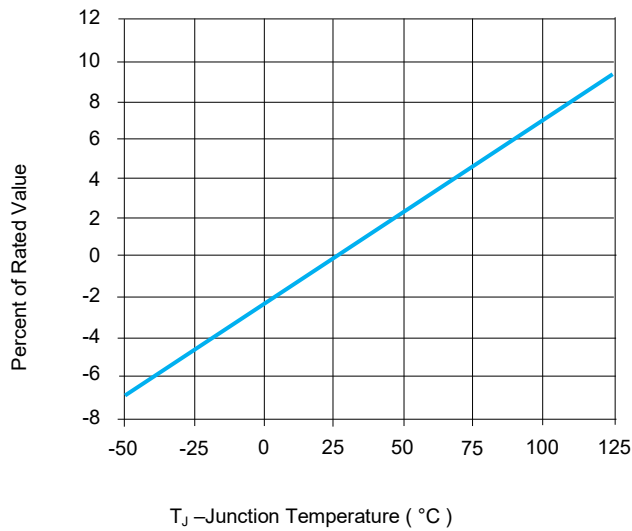


FIGURE 3 Typical  $V_{BR}$  Vs Junction Temperature


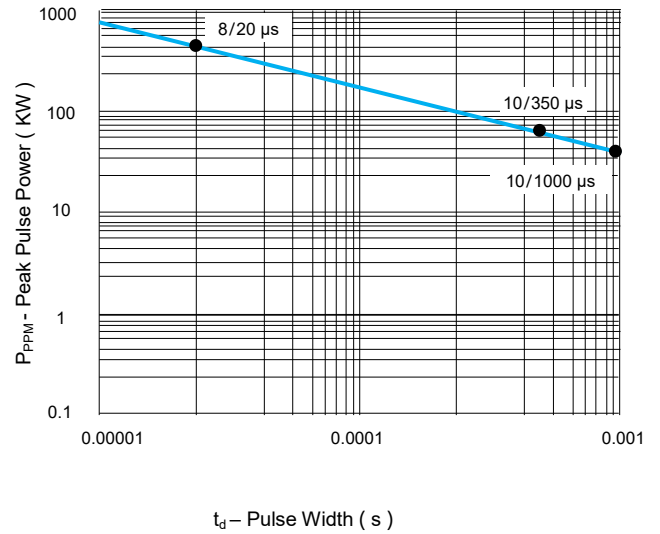


FIGURE 4 Peak Pulse Power Rating Curve

# TVS Diodes

Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)

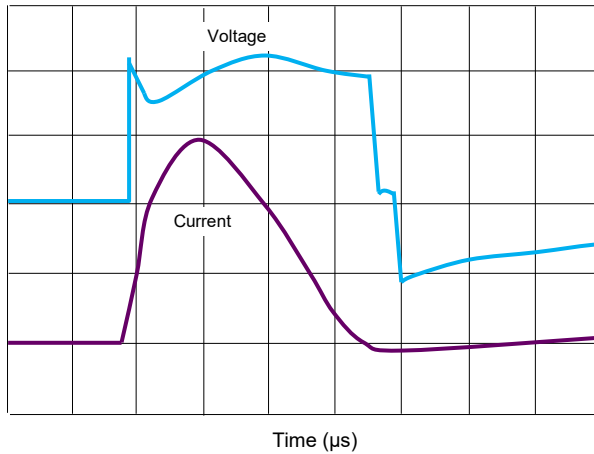

**Note:** The power dissipation causes a change in avalanche voltage during the surge and the avalanche voltage eventually returns to the original value when the transient has passed.

FIGURE 5 Surge Response (8/20 Surge current waveform)

## Flow/Wave Soldering (Solder Dipping)

<b>Peak Temperature</b>	260 °C +0 / -5 °C
<b>Dipping Time</b>	10 seconds
<b>Soldering Number</b>	1 time

## Physical Specifications


<b>Weight</b>	Contact manufacturer
<b>Case</b>	Epoxy encapsulated
<b>Terminal</b>	Silver plated leads, solderability per MIL-STD-750 Method 2026

# TVS Diodes

Transient Voltage Suppression Diodes

SPCL20 Series (20 kA)

## Soldering Parameters

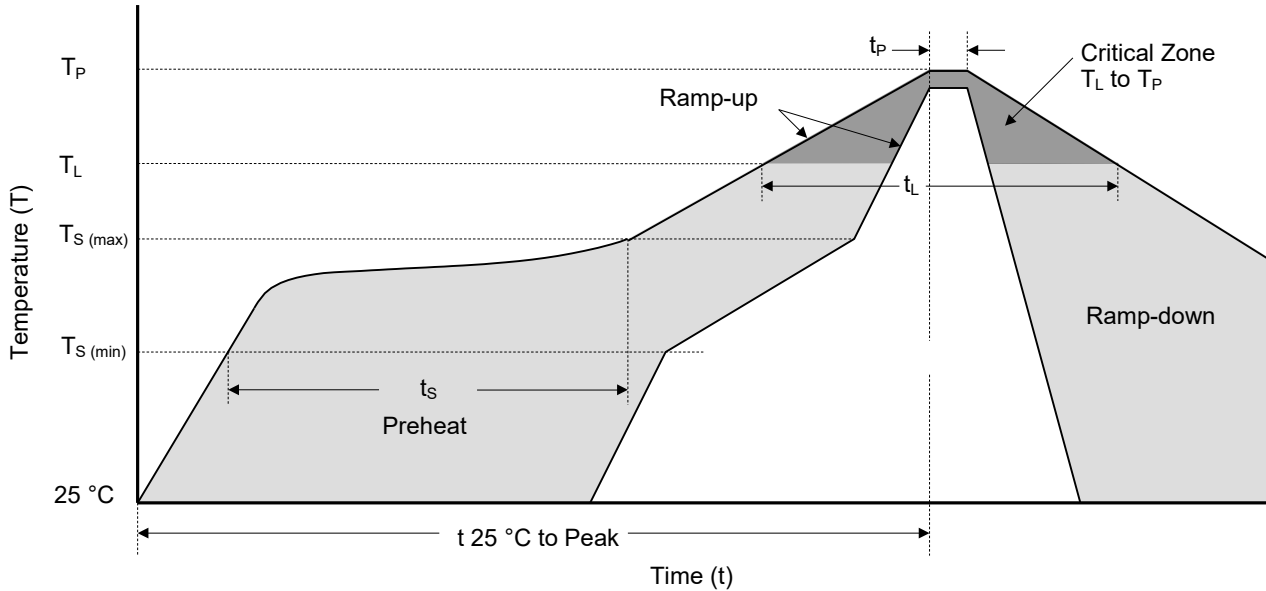

Reflowing Condition

Reflow Soldering Parameters		Lead-Free Assembly
Pre-heat	Temperature Min ( $T_{S(min)}$ )	150 °C
	Temperature Max ( $T_{S(max)}$ )	200 °C
	Time (min to max) ( $t_s$ )	60 ~ 120 seconds
Average Ramp Up Rate (Liquidus Temp ( $T_L$ ) to Peak)		3 °C / second max.
$T_{S(max)}$ to $T_L$ Ramp-up Rate		3 °C / second max.
Reflow	Temperature ( $T_L$ ) (Liquidus)	217 °C
	Time (min to max) ( $t_L$ )	60 ~ 150 seconds
Peak Temperature ( $T_P$ )		260 <sup>+0/-5</sup> °C
Time of within 5 °C of Actual Peak Temperature ( $t_p$ )		20 ~ 40 seconds
Ramp-down Rate		6 °C / second max.
Time from 25 °C to Peak Temperature		8 Minutes max.
Do Not Exceed		260 °C

## Packaging Information

Part Number	Package	Quantity	Packaging Option
SPCL20-XXXX	SPCL Package	56 PCS / Box	Bulk
SPCL20-XXXX-12	SPCL Package	12PCS / Box	Bulk

## Glossary

Item	Description
$V_C$	<b>Clamping Voltage</b> Voltage across TVS in a region of low differential resistance that serves to limit the voltage across the device terminals.
$V_R$	<b>Reverse Stand-off Voltage</b> Maximum voltage that can be applied to the TVS without operation. NOTE : It is also shown as $V_{WM}$ (maximum working voltage (maximum d.c. voltage)) and known as rated stand-off voltage ( $V_{so}$ ).
$I_R$	<b>Reverse Leakage Current</b> Current measured at $V_R$ . NOTE : Also shown as $I_D$ for stand-by current.
$V_{BR}$	<b>Breakdown Voltage</b> Voltage across TVS at a specified current $I_T$ in the breakdown region.
$I_{PPM}$	<b>Rated Random Recurring Peak Impulse Current</b> Maximum-rated value of random recurring peak impulse current that may be applied to a device.
$P_{M(AV)}$	<b>Rated Average Power Dissipation</b> Maximum-rated value of power dissipation resulting from all sources, including transients and standby current, averaged over a short period of time.
$P_{PPM}$	<b>Rated Random Recurring Peak Impulse Power Dissipation</b> Maximum-rated value of the product of rated random recurring peak impulse current ( $I_{PPM}$ ) multiplies by specified maximum clamping voltage ( $V_C$ ).
$C_J$	<b>Capacitance</b> Capacitance across the TVS measured at a specified frequency and voltage.
$V_{FS}$	<b>Peak Forward Surge Voltage</b> Peak voltage across an TVS for a specified forward surge current ( $I_{FS}$ ) and time duration. NOTE : Also shown as $V_F$ .
$I_{FS}$	<b>Forward Surge Current</b> Pulsed current through TVS in the forward conducting region. NOTE : Also shown as $I_F$ .
$\alpha_{V(BR)}$	<b>Temperature Coefficient of Breakdown Voltage</b> The change of breakdown voltage divided by the change of temperature.
$I_{PP}$	<b>Peak pulse Current</b> Peak pulse current value applied across the TVS to determine the clamping voltage $V_C$ for a specified wave shape.
$I_T$	<b>Pulsed D.C. Test Current</b> Test current for measurement of the breakdown voltage $V_{BR}$ . This is defined by the manufacturer and usually given in milliamperes with a pulse duration of less than 40 ms. NOTE : Also shown as $I_{BR}$ .

—(GB-T 18802.321 / IEC 61643-321 / JESD210A)



# ATTENTION

## Usage

1. TVS must be operated in the specified ambient temp.
2. Do not clean the TVS with strong polar solvent such as ketone, esters, benzene and halogenated hydrocarbon, to avoid damaging the encapsulating layer.
3. Please do not apply severe vibration, shock or pressure to TVS, to avoid element cracking.

## Replacement

1. If TVS is visually damaged, please replace it.
2. TVS is a non-repairable product. For safety sake, please use equivalent TVS for replacement.

## Storage

1. Storage Temp. Range: (-55 to 150) °C.
2. Do not store the TVS at the high temp., high humidity or corrosive gas environment, to avoid influencing the solder- ability of the lead wires. The product shall be used up within 1 year after receiving the goods.

## Environmental Conditions

1. TVS should not be exposed to the open air, nor direct sunshine.
2. TVS should avoid rain, water vapor or other condition of high temp. and high humidity.
3. TVS should avoid sand dust, salt mist, or other harmful gases.

## Max. Typical Capacitance of TVS

The typical capacitance of TVS is listed in the specifications. Designers may refer to it when designing TVS in High frequency circuit.

## Installation Mechanical Stress

1. Do not knock TVS when installing, to avoid mechanical damage.
2. Please do not apply severe vibration, shock or pressure to TVS, to avoid surface resin or element cracking.